


DATA CENTER SWITCH

Wedge100BF-65X

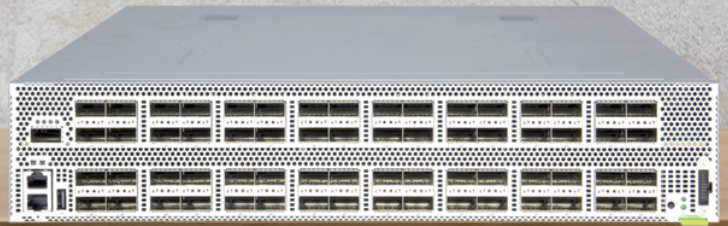

The Edgecore DCS802 switch is a Top-of-Rack (TOR) or spine switch for high-performance data centers. In a 2RU form factor, the switch provides line-rate L2 and L3 switching across the 65 x QSFP28 ports, supporting up to 65 x 25/40/50/100 GbE connections. The DCS802 can be deployed as a TOR switch supporting 25/50 GbE to servers with 40/50/100 GbE uplinks, or as a spine switch supporting 40/50/100 GbE spine interconnects. This open network switch is loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible Network Operating System software, including the open source option and commercial NOS offerings.

Key Features and Benefits

- Designed with programmable Tofino switch silicon from Intel Networks.
- Deploys as top-of-rack or spine switch supporting 25 GbE to servers, with 40, 50 or 100 GbE uplinks.
- Deploys as spine switch supporting 40, 50, or 100 GbE ToR and spine interconnects.
- 65 x QSFP28 switch ports, each supporting 1 x 100 GbE, 1 x 50 GbE, or 1 x 40 GbE, or via breakout cables, 4 x 25 GbE or 4 x 10 GbE.
- Layer 2 or Layer 3 switching capacity of 12.8 Tbps (full duplex).
- Supports hot/cold aisle with port-to-power airflow SKU.
- All ports on front; PSUs and fans accessible from rear.
- Hot-swappable, load-sharing, redundant AC or 48V DC PSUs.
- 9+1 redundant, hot-swappable fan modules.
- Switch pre-loaded with diagnostics and Open Network Install Environment (ONIE) for automated loading of compatible open source and commercial NOS offerings.



Freedom
of choice



Greater
control



Rapid
innovation




Reduced
CAPEX and OPEX

Free Software Included



Interfaces

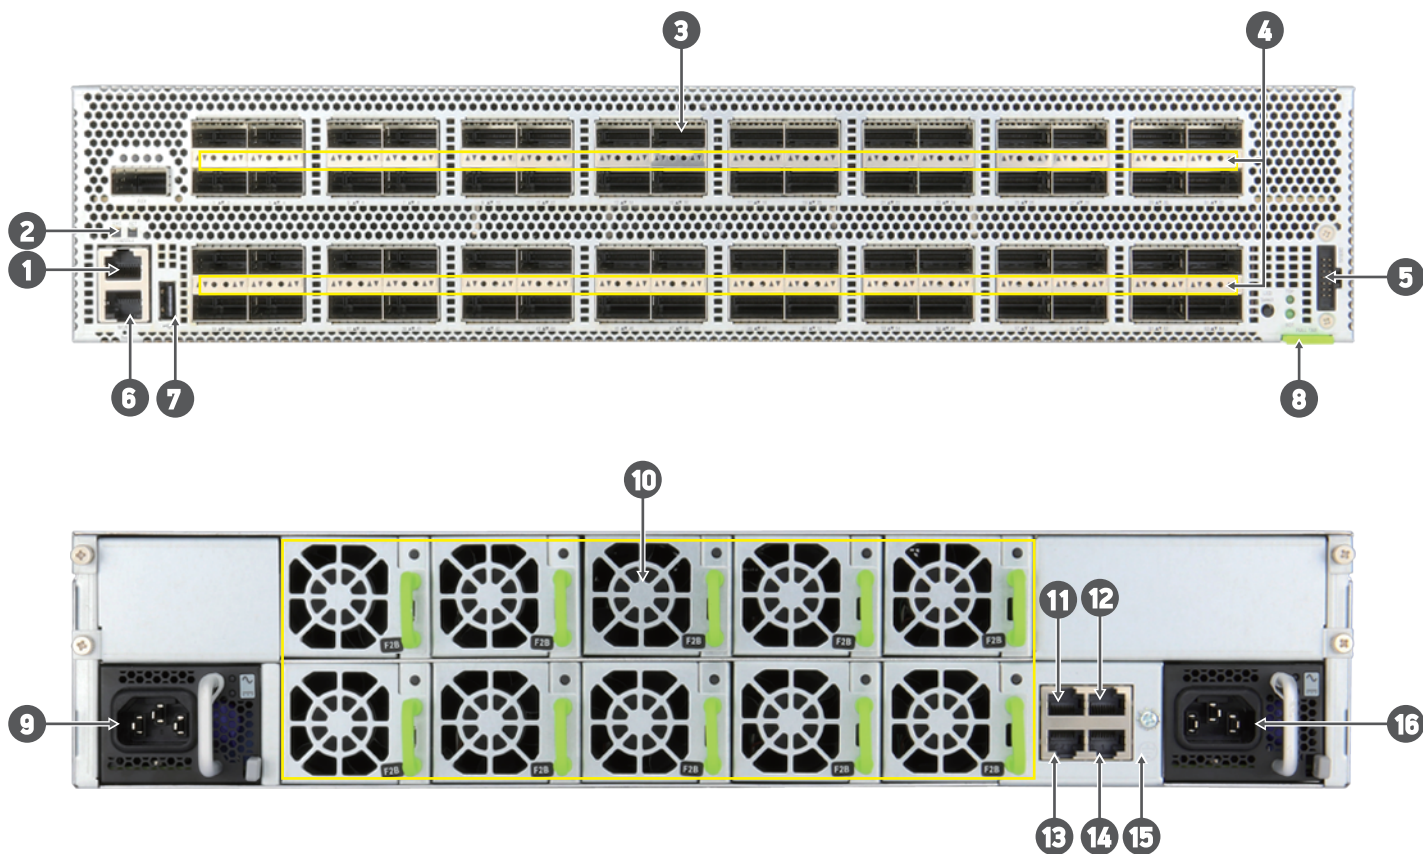

Description

- | | |
|---------------------------|--------------------------------------|
| 1. Console port | 9. PSU 2 |
| 2. System LEDs | 10. Hot-swappable 9+1 redundant fans |
| 3. 65 x 100G QSFP28 ports | 11. RS485 1 (reserved) |
| 4. Port indicators LEDs | 12. RS485 3 (reserved) |
| 5. Debug port (UART) | 13. RS485 2 (reserved) |
| 6. Management port | 14. GPIO 1 (reserved) |
| 7. USB storage port | 15. Grounding screw |
| 8. Product label | 16. PSU 1 |

Ports

- Switch Ports:
 - 65 x QSFP28 ports. Each port supports 1x25/40/50/100 GbE or 4 x 10/25 GbE per port using breakout cables
- Management ports on port side:
 - 1 x RJ-45 serial console
 - 1 x RJ-45 1G BASE-T management
 - 1 x USB Type A storage
- Supported Transceivers and Cables:
 - 40GBASE-SR4/LR4
 - 40G-DAC/AOC Cable
 - 100GBASE-SR4/CWDM4/LR4
 - 100G-DAC/AOC Cable
 - Note: More optics and detailed cabling information can be found at www.edge-core.com.

Key Components

- Switch Silicon: Intel Tofino BFN-T10-064Q (Quad pipeline)
 - No PHYs, No Retimers
- CPU Modules:
 - Intel® Pentium® D-1517
 - 8 GB SO-DIMM DDR4 RAM
 - 16 MB SPI Flash
 - 128 GB M.2 SSD

Performance

- Switching Capacity: 12.8 Tbps
- Forwarding Rate: 9.5 Bpps
- Jumbo frames support up to 9216 Bytes
- Packet Buffer Size: 22 MB integrated packet buffer

Physical and Environmental

- Dimensions (WxDxH): 440 x 509 x 87 mm (17.32 x 20.03 x 3.42 inch)
- Weight: 14.275 kg (31.47 lb)
- Fans: hot-swappable 9+1 redundant fans
- Operating Temperature: 0°C to 40°C (32°F to 104°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 0% to 95% non-condensing
- Operating Altitude: 0 to 10,000 feet

Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with the following NOS options: open source options, plus commercial NOS offerings

LEDs

- QSFP28 Port LEDs: Link Status, Activity, Rate
- Ethernet Management Port LED: Link Status, Activity
- Console Port LED: Link Status
- System LEDs: Diagnostic, Locator, PSU and Fan Status

Power

- PSUs: 2 redundant, load-sharing, hot-swappable AC/DC
- Input Voltage: 90 to 240 VAC at 50-60 Hz

Regulatory Compliance

- EMI
 - CE Mark
 - EN55022 Class A
 - EN55024
 - EN61000-3-2
 - EN61000-3-3
 - EN61000-3-11
 - EN61000-3-12
 - FCC Part 15 Subpart B Class A
 - CCC
 - BSMI
 - VCCI
- Safety
 - UL
 - CSA
- Environmental:
 - Temperature: IEC 68-2-14
 - Vibration: IEC 68-2-36, IEC 68-2-6
 - Shock: IEC 68-2-29
 - Drop: ISTA 2A
 - Acoustic Level: 62 dB@ 27°C
- RoHS-6 Compliant

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2023 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

Ordering Information

Base Model: Wedge100BF-65X; Intel® Pentium® D-1517; 65-Port 100G QSFP28; ONIE Software Installer.

Model Number	Part Number	PSU	Airflow	Region (Power Cord)
Wedge100BF-65X-O-AC-F-JP	F0PCH7664500S	Dual AC PSUs	Port-to-Power Airflow	JP
Wedge100BF-65X-O-AC-F-US	F0PCH7664400S	Dual AC PSUs	Port-to-Power Airflow	US
Wedge100BF-65X-O-AC-F-UK	F0PCH7664300S	Dual AC PSUs	Port-to-Power Airflow	UK
Wedge100BF-65X-O-AC-F-EU	F0PCH7664200S	Dual AC PSUs	Port-to-Power Airflow	EU

Accessories

Model Number	Part Number	Description	Airflow
Wedge100BF-FAN-F	F0TEC7632000H	Fan module	Port-to-Power Airflow
PFE1100-12-054ND	F0TEC7632000A	DC Power supply, 1100 W	Port-to-Power Airflow
PFE1100-12-054NA	F0TEC7632001A	AC Power supply, 1100 W	Port-to-Power Airflow